

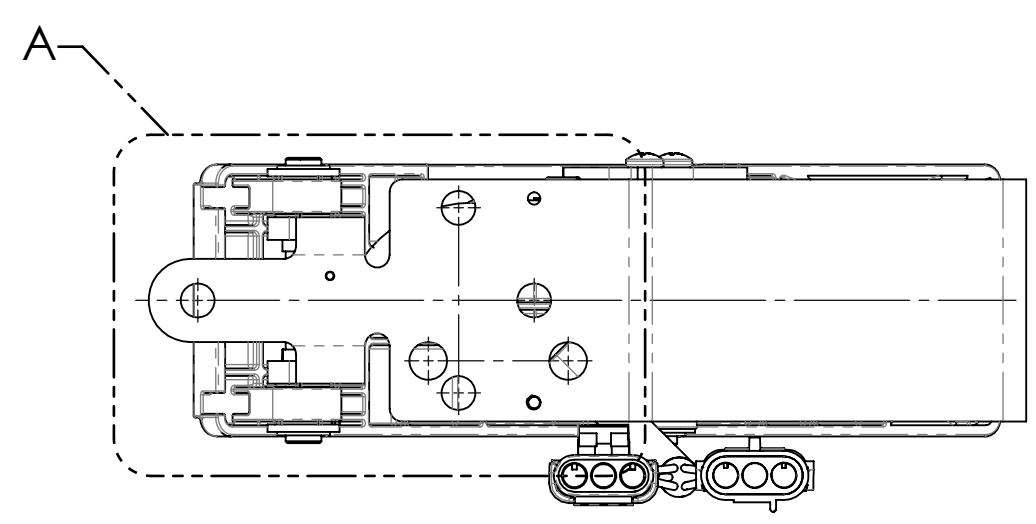
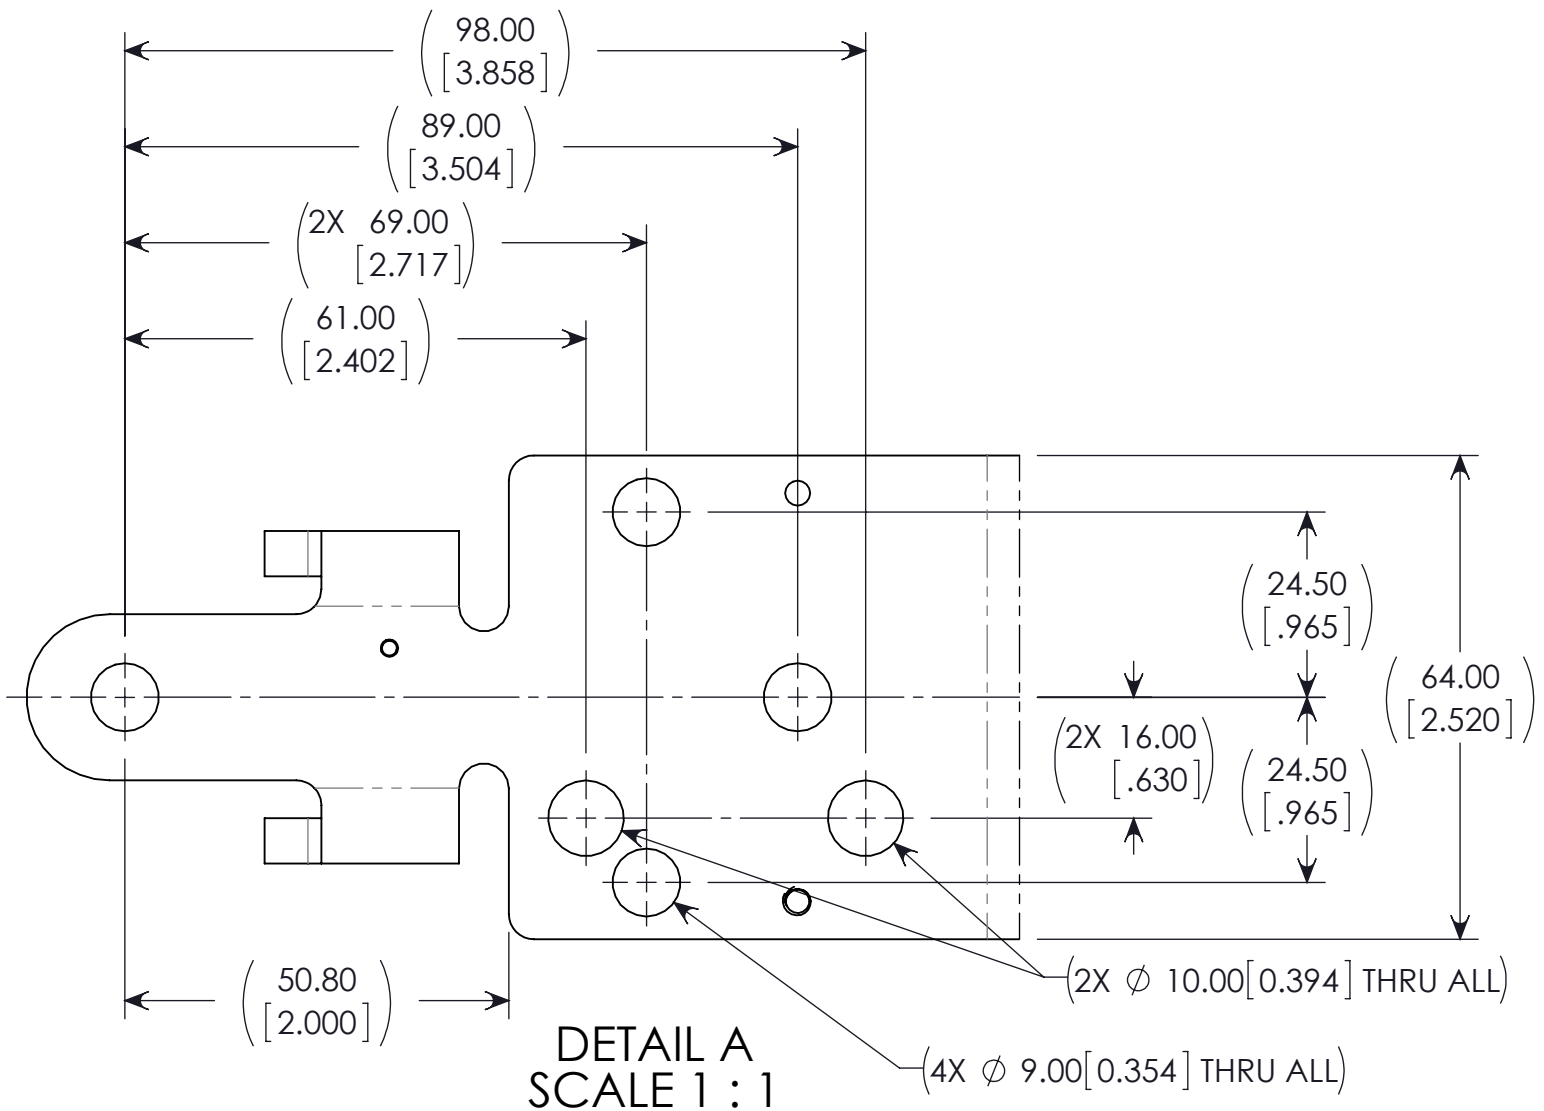
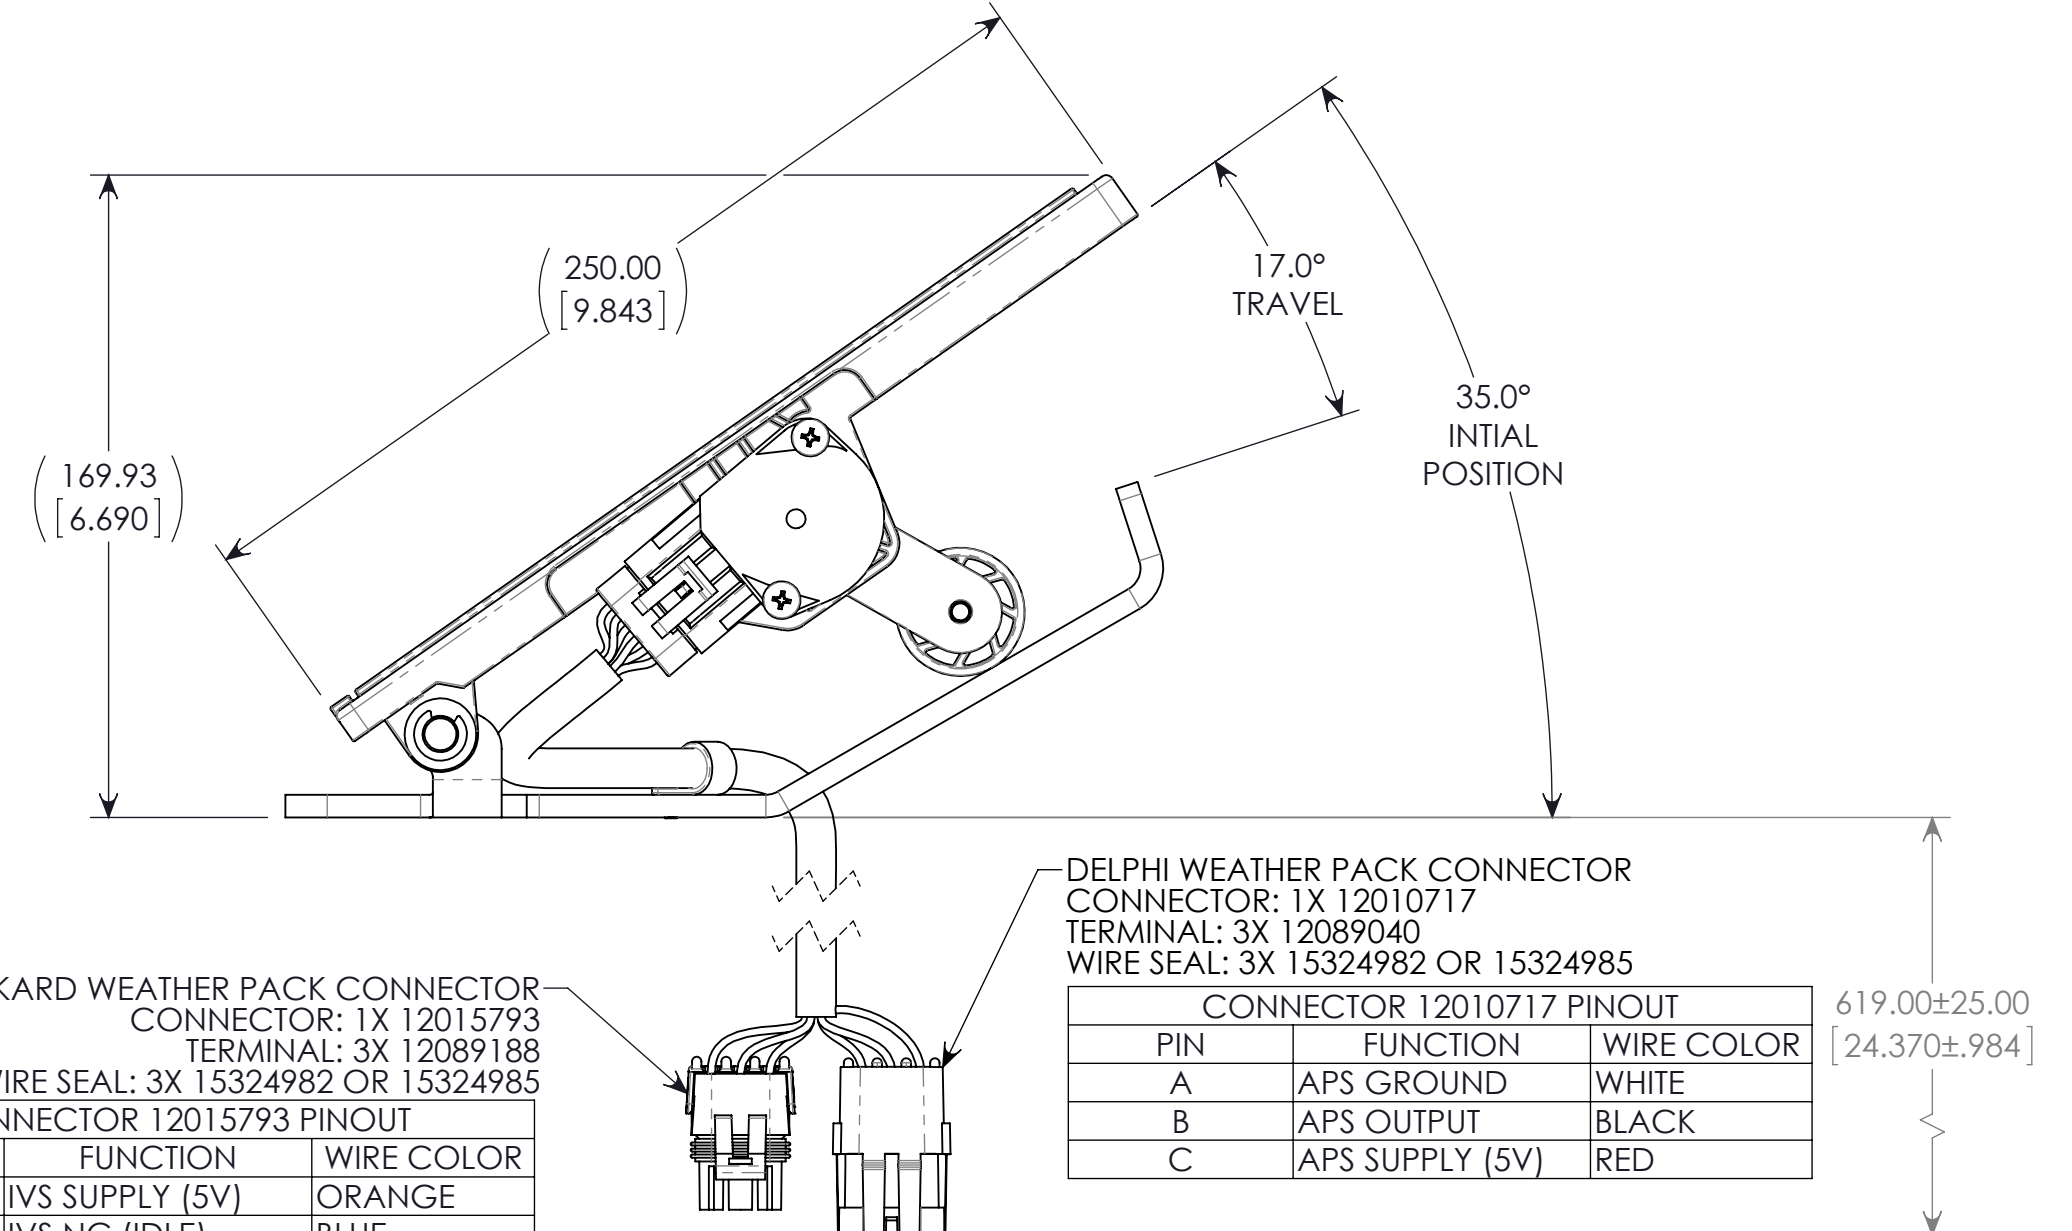
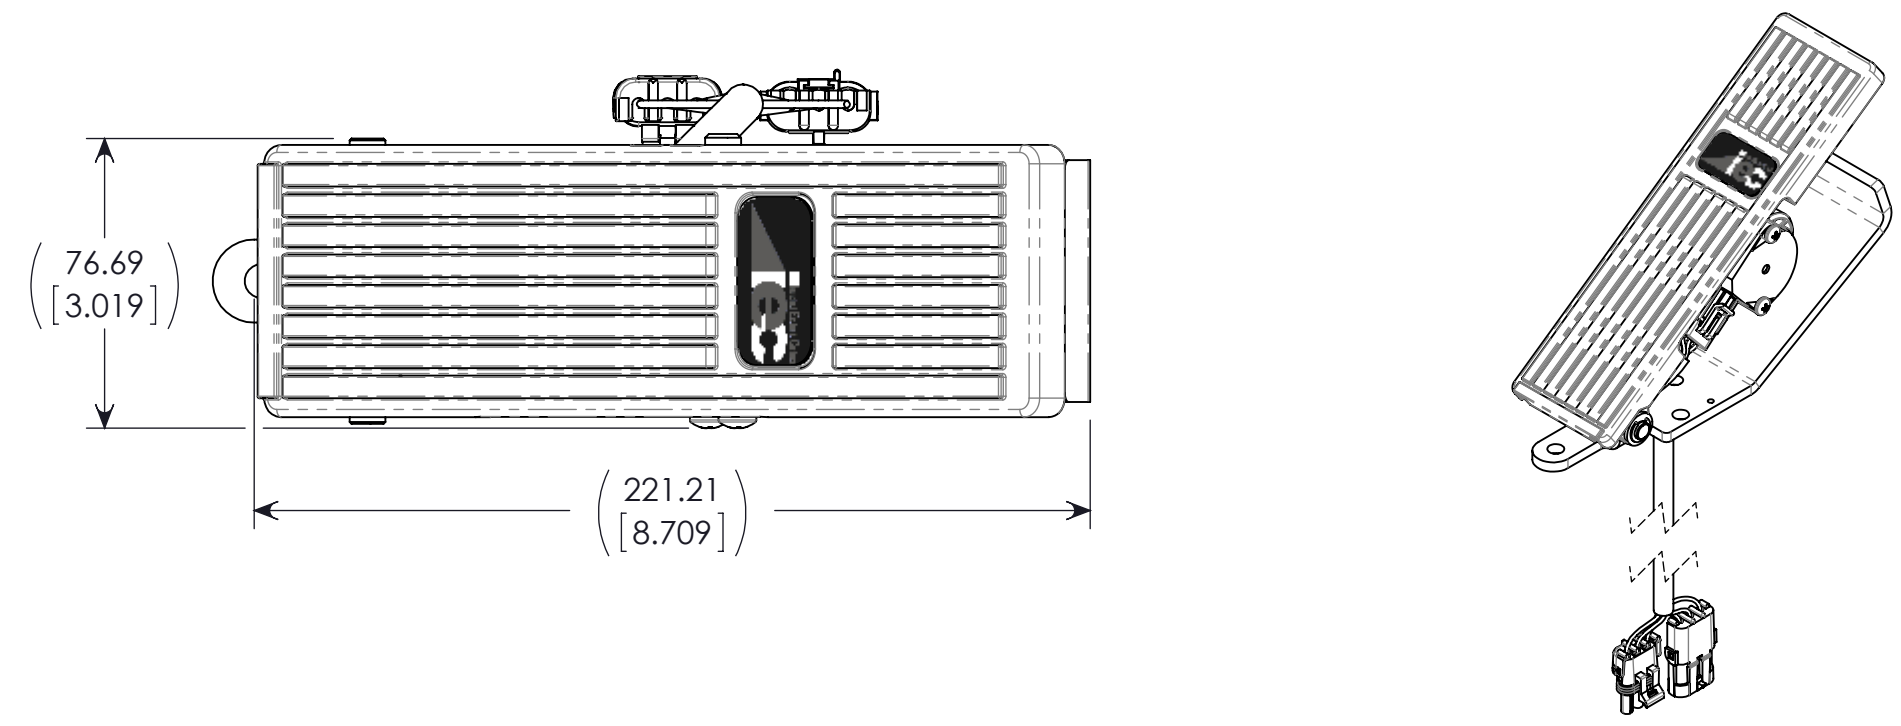
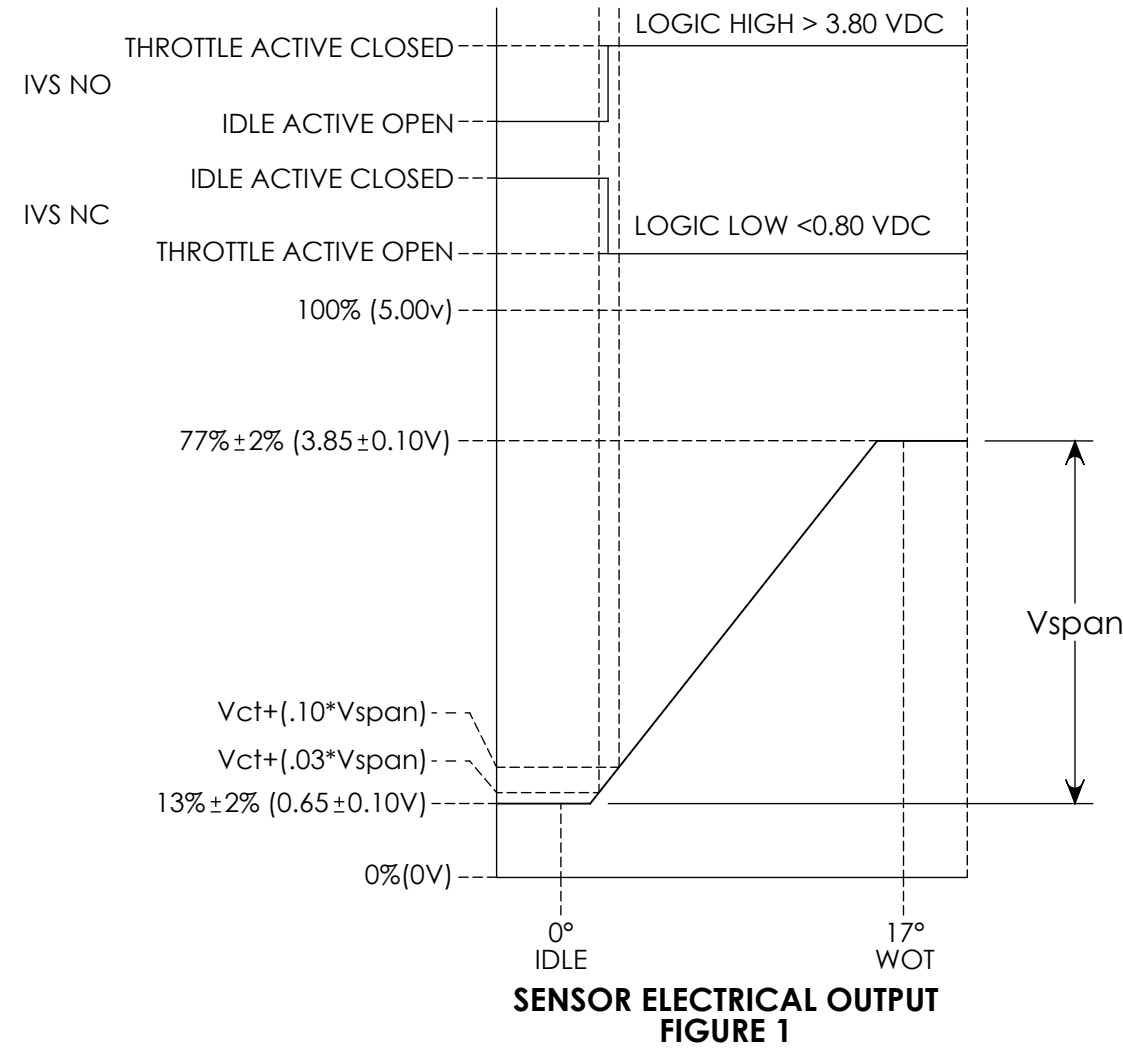
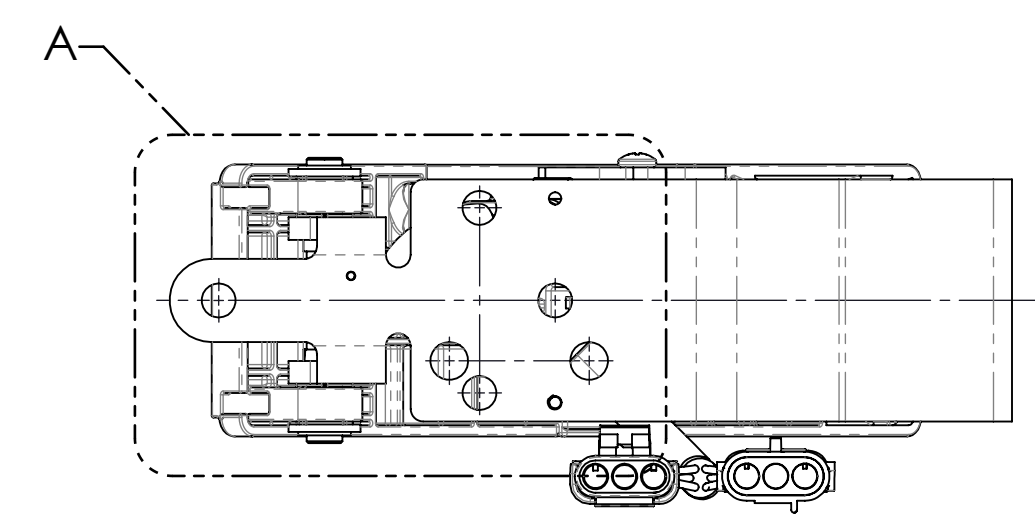
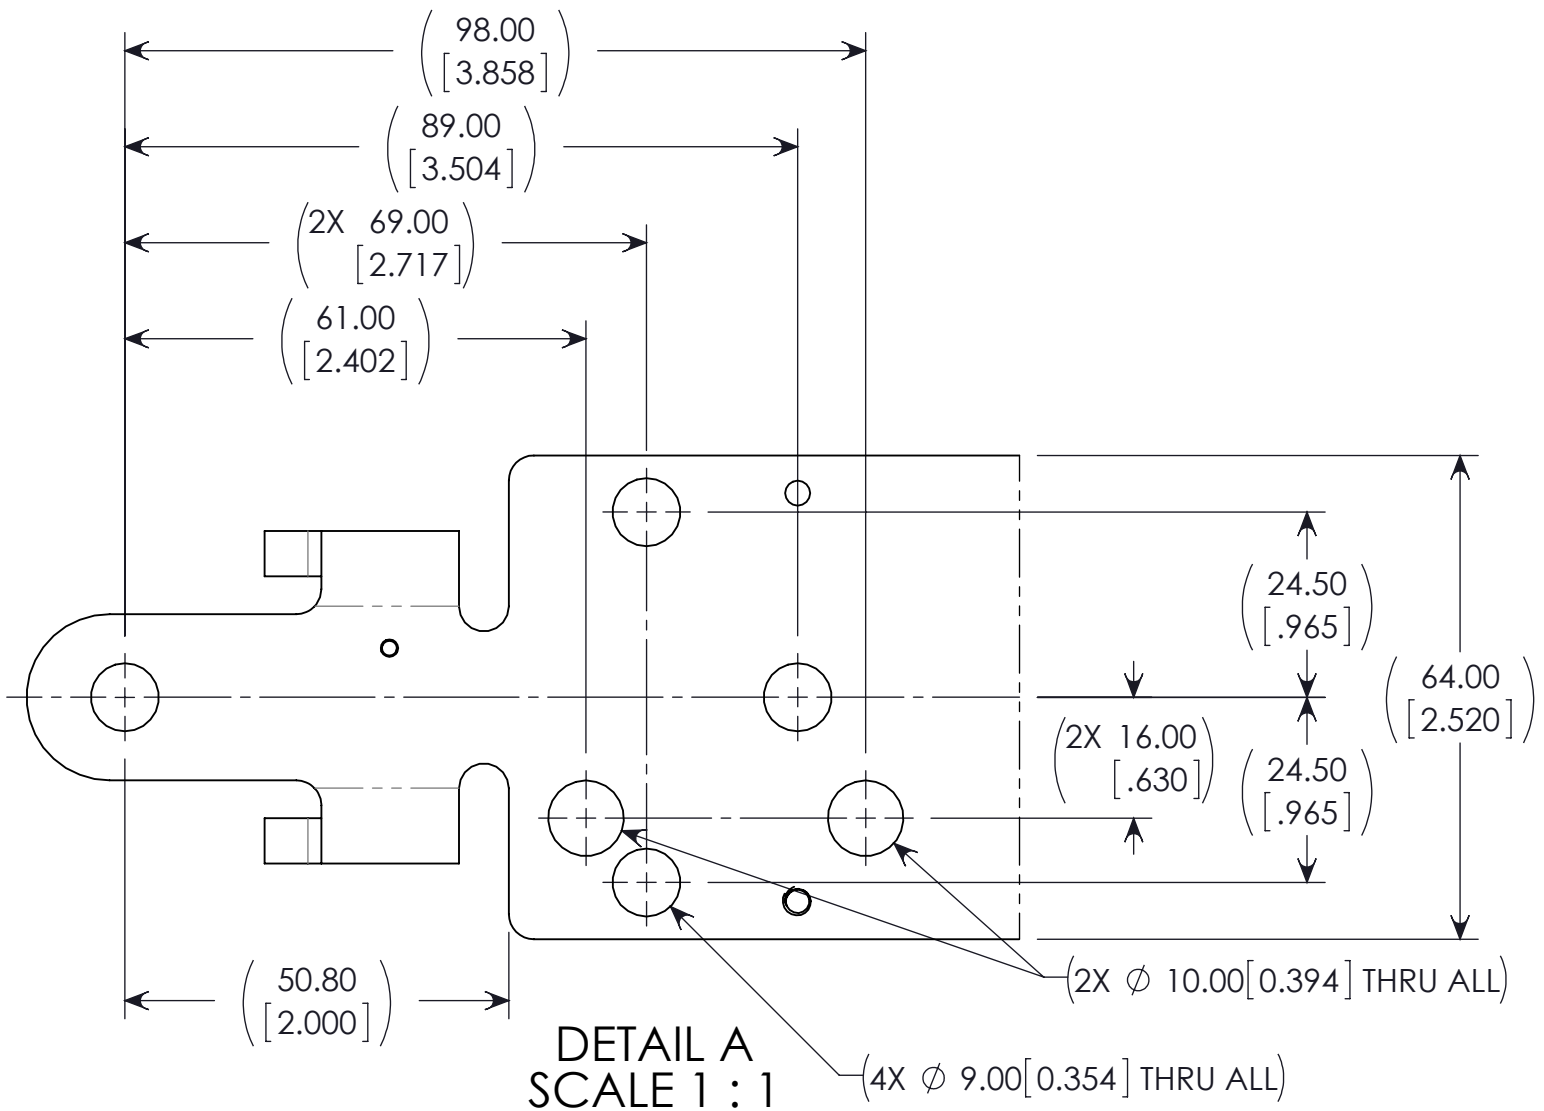
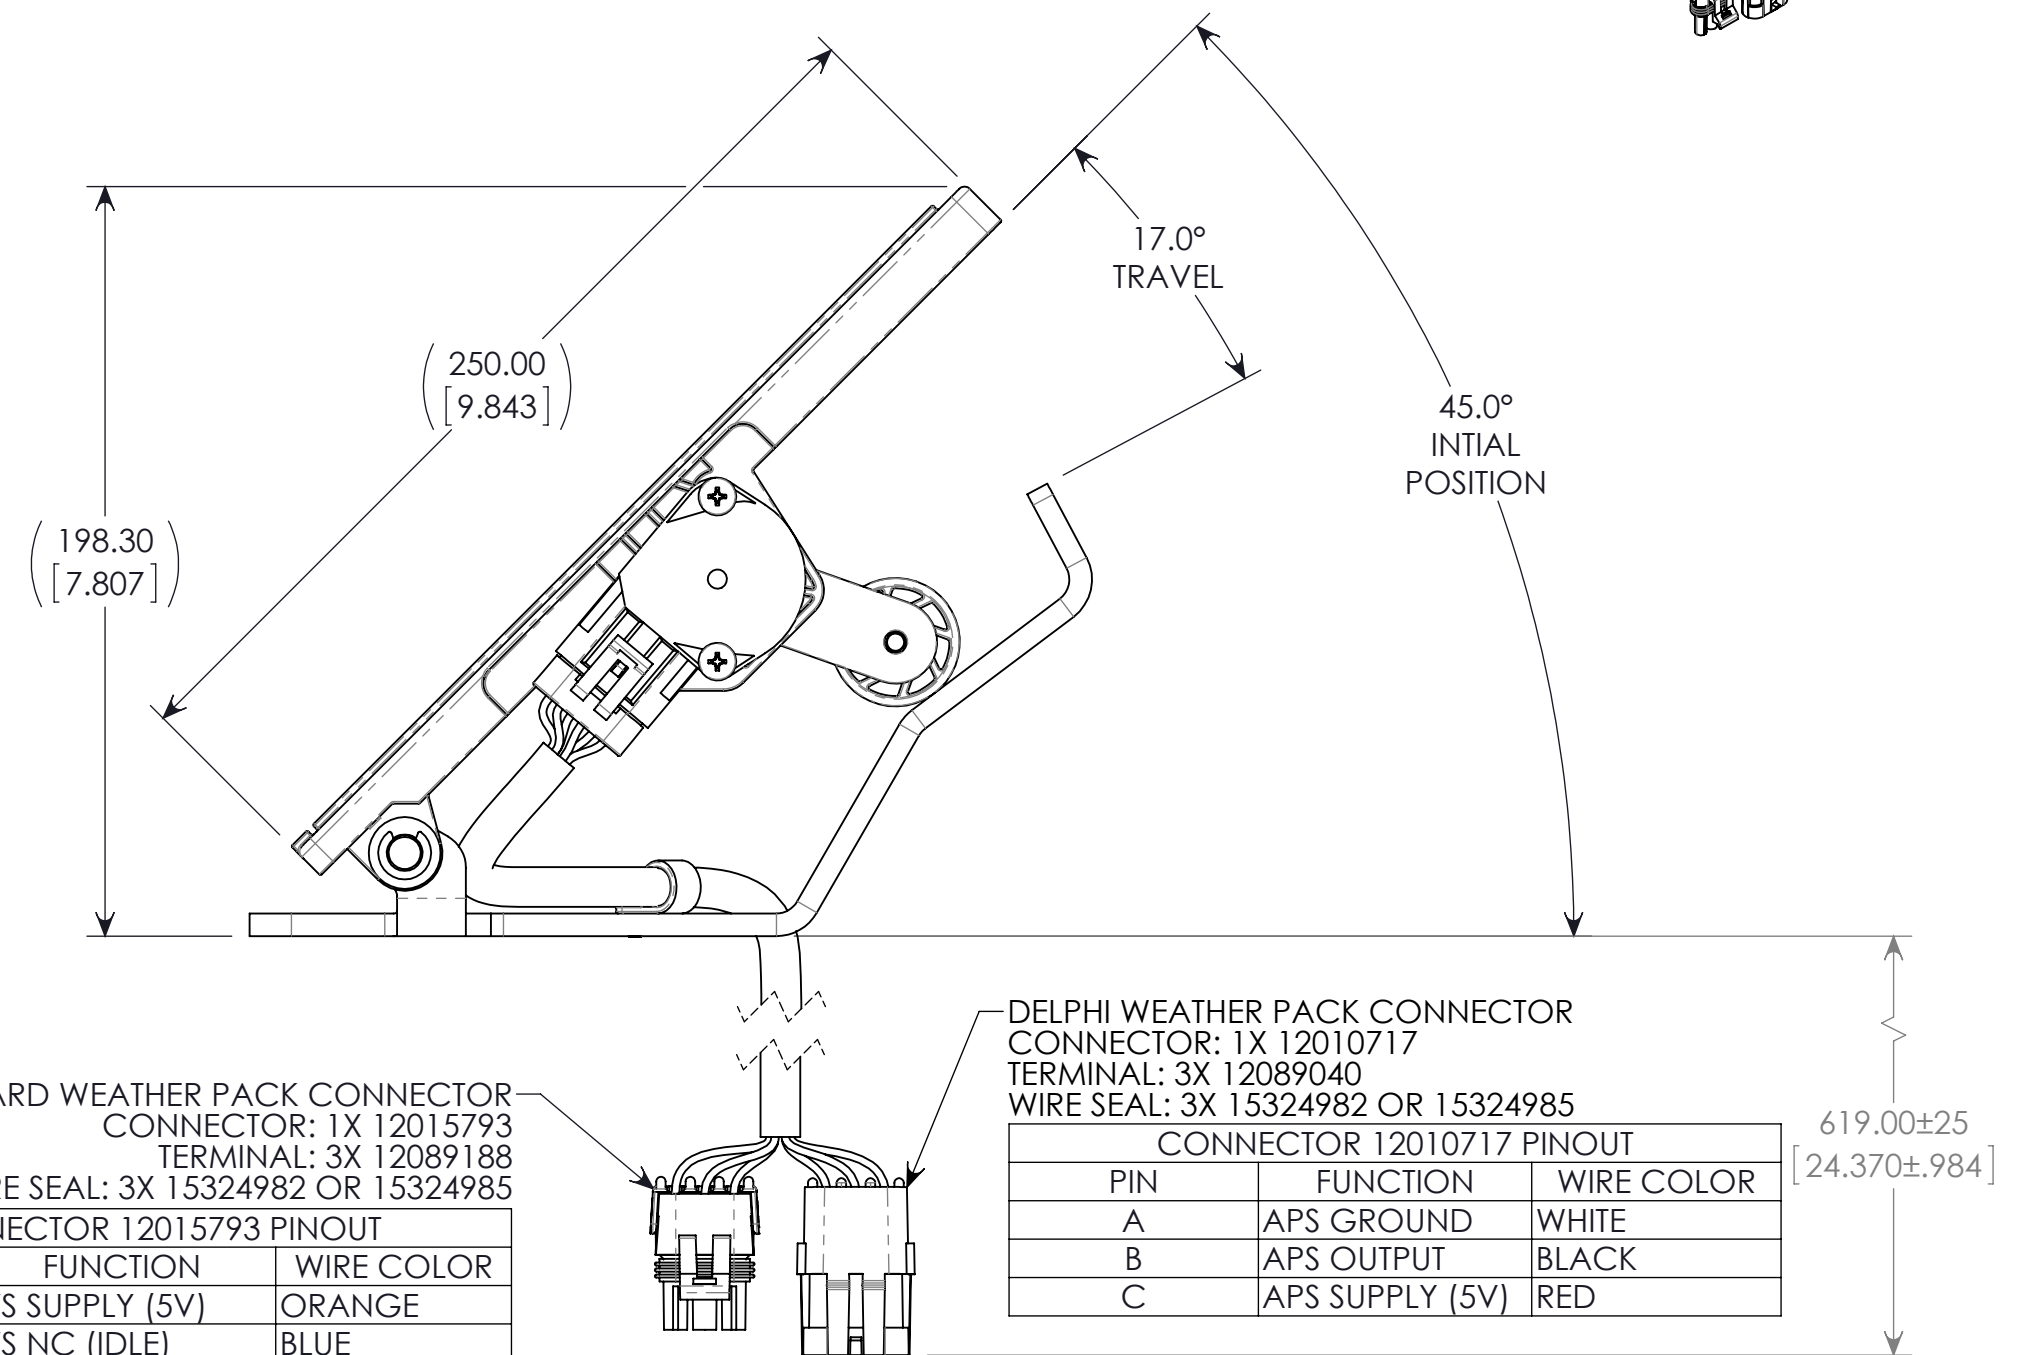
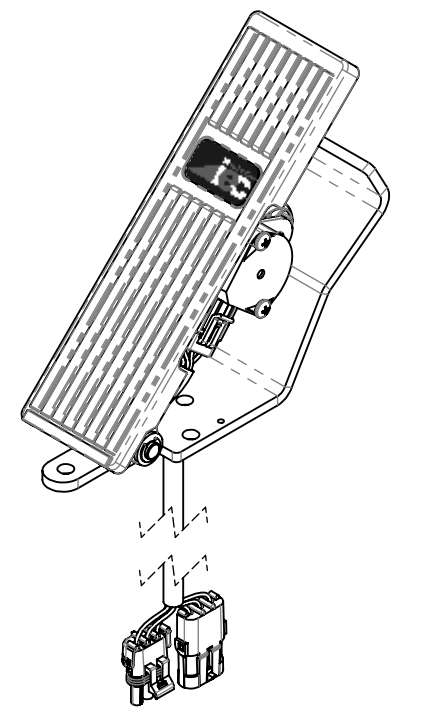


SPECIFICATIONS:

1. GENERAL REQUIREMENTS
 - IN ACCORDANCE WITH SAE J1843
 - IN ACCORDANCE WITH FMVSS124
2. ENVIRONMENTAL DATA
 - PROTECTIONAL CLASS: IP66
 - WORKING TEMPERATURE: -40°C TO +85°C
3. ELECTRICAL DATA
 - INPUT VOLTAGE: 5.0V ±1%
 - MAXIMUM VOLTAGE: 16V
 - MAXIMUM CURRENT: 10mA
 - TOTAL RESISTANCE APS 1: 2.5KΩ ±15%
 - INDEPENDANT LINEARITY: ±2%
 - SYNCHRONICITY: 1.4%
 - OUTPUT SIGNALS: SEE FIGURE 1 MEETS CUMMINS AEB 15.59
4. MECHANICAL DATA
 - MAXIMUM LOAD: 160±5 KGF
5. MATERIAL
 - PEDAL: BLACK NYLON 6/6 30% GLASS FILLED
 - BOTTOM PLATE: ZINC PLATED STEEL
 - WIRE: AEX OR AVX 0.5 mm²
6. DURABILITY
 - LIFETIME: >3,000,000 CYCLES
7. PEDAL FORCE REQUIREMENTS:
 - 5LBS TO START MOTION
 - 12LBS MAX AT FULL TRAVEL

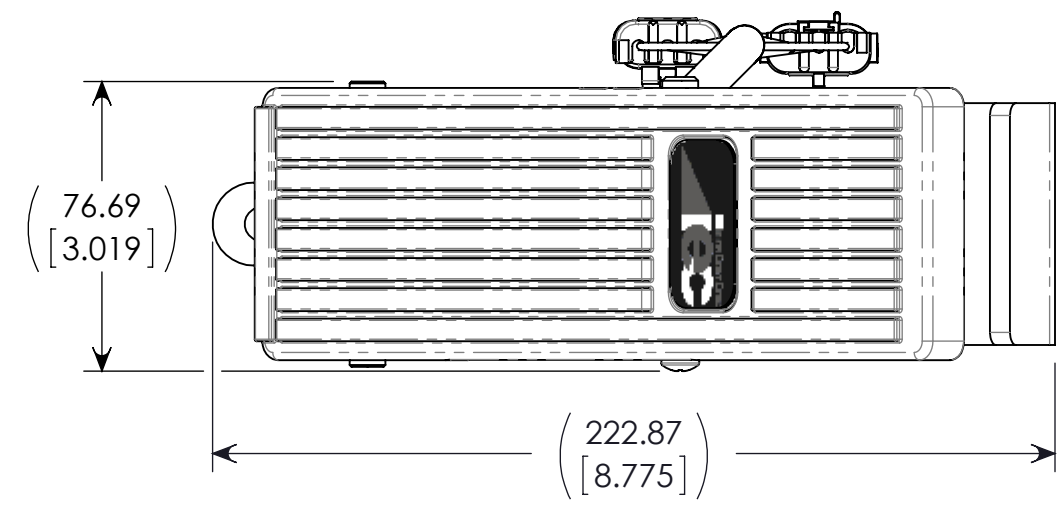

- SPECIFICATIONS:**
- GENERAL REQUIREMENTS**
 - IN ACCORDANCE WITH SAE J1843
 - IN ACCORDANCE WITH FMVSS124
 - ENVIRONMENTAL DATA**
 - PROTECTIONAL CLASS: IP66
 - WORKING TEMPERATURE: -40°C TO +85°C
 - ELECTRICAL DATA**
 - INPUT VOLTAGE: 5.0V ±1%
 - MAXIMUM VOLTAGE: 16V
 - MAXIMUM CURRENT: 10MA
 - TOTAL RESISTANCE APS 1: 2.5KΩ ±15%
 - INDEPENDANT LINEARITY: ±2%
 - SYNCHRONICITY: 1.4%
 - OUTPUT SIGNALS: SEE FIGURE 1 MEETS CUMMINS AEB 15.59
 - MECHANICAL DATA**
 - MAXIMUM LOAD: 160±5 KGF
 - MATERIAL**
 - PEDAL: BLACK NYLON 6/6 30% GLASS FILLED
 - BOTTOM PLATE: ZINC PLATED STEEL
 - WIRE: AEX OR AVX 0.5 mm²
 - DURABILITY**
 - LIFETIME: >3,000,000 CYCLES
 - PEDAL FORCE REQUIREMENTS:**
 - 5LBS TO START MOTION
 - 12LBS MAX AT FULL TRAVEL

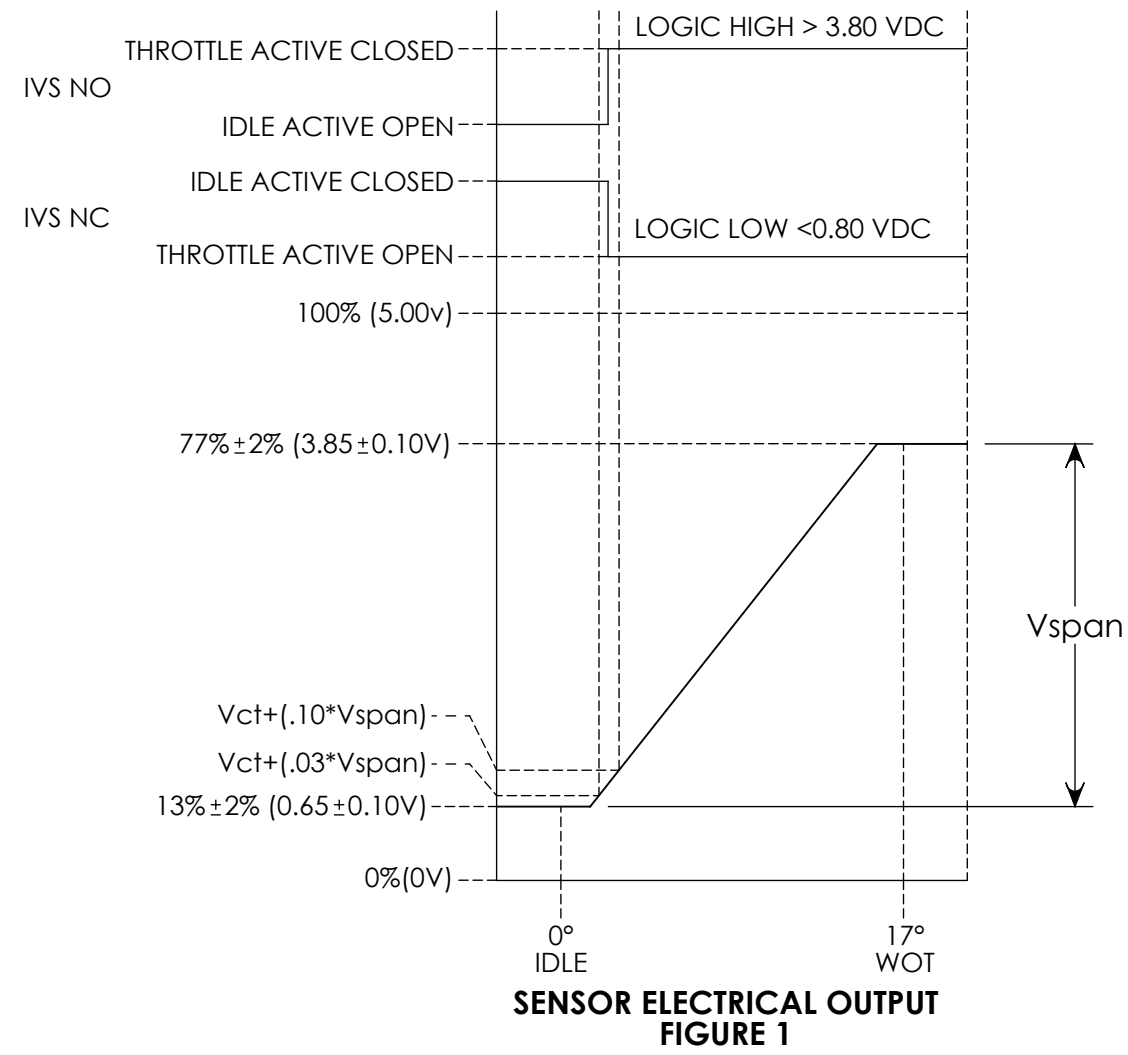

Herbertek www.herbertek.se
 info@herbertek.se +46-18 590510

UNITS IN millimeter [inch]
PART #
10469-45P-619C-S1377